

EB-101-S

1-Port RS-232 To RS-422/485 Converter




Feature

- Plug & Play installation
- Built in 15KV ESD protection for signals
- RS-422/485 surge protection
- Built in 100 ohm Termination resistor
- LED indicator for transmission status



Application Note :

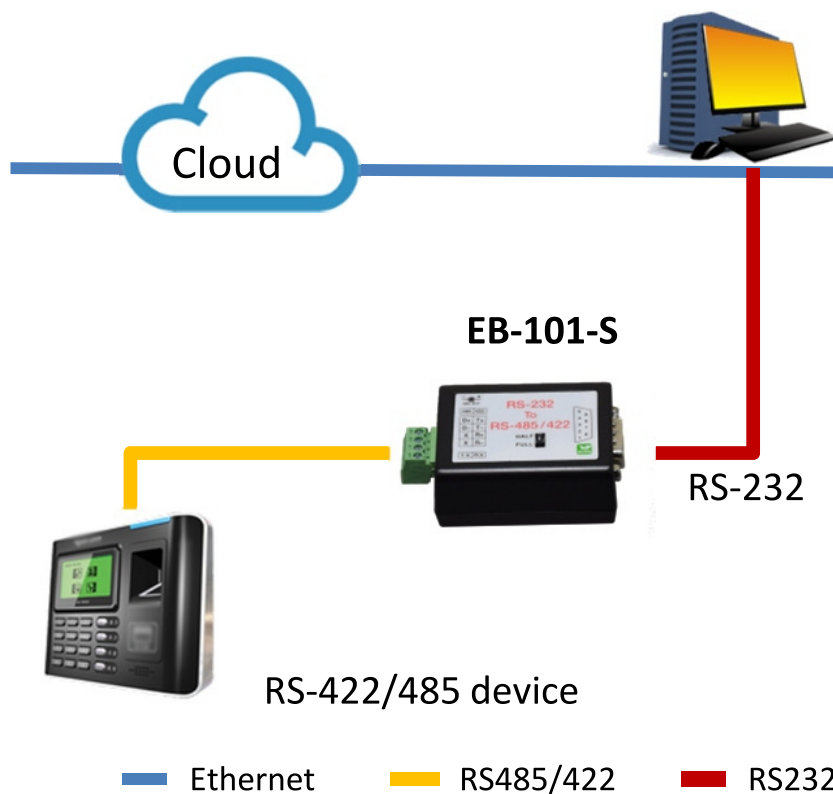

Specification

Serial Interface

Port Type	RS-232 x 1 Port (DB9) to RS-422/485 x 1 Port (4-pin Terminal Block)
Connector	Male DB9 / 4-pin Terminal Block
Speed	300 bps ~ 230.4 Kbps
Parity	None , Odd , Even , Mark , Space
Data Bit	5, 6 , 7 , 8
Stop Bit	1, 2
RS-232	Rx , Tx , GND (RTS to CTS, DTR to DSR and DCD are shorted)
RS-422	Rx+ , Rx- , Tx+ , Tx-
Built-in	RS-422/485 pull high / low Resistor
Protection	422/485 Surge Protection Built in 15KV ESD protection for all signals
Termination	Built in 100 Ohm Termination resistor
Resistor	switch On/Off
Distance	Up to 1250m

Power

Input	DC 5V, 20mA@ 5VDC
Mode	DC jack adapter
Protection	Wrong polarity input protection
LED	SYS (PWR), Rx, Tx

Environment

Temperature	Operating: 0°C ~ 65°C (32°F ~ 149°F) Storage: -20°C ~ 70°C (-4°F ~ 158°F)
Humidity	Operating: 10% ~ 95% non-condensing Storage: 5% ~ 95% non-condensing

Dimension

Case Dimension	55 x 40 x 25 mm (W x D x H)
Weight	35g

Regulatory Approvals

RoHS	Compliance
------	------------

Warranty

Warranty period	1 year
-----------------	--------

Ordering Information

EB-101-S	1-Port RS-232 To RS-422/485 Converter
----------	---------------------------------------