

ENP1U01060

6-Port Industrial Unmanaged Ethernet Switch
4x10/100Tx + 2x100Fx, 12-48VDC Power Input




Feature

- 6-Port Industrial Ethernet Switch
- 2-port 100Fx - SC connector (Multi Mode)
- Redundant Power Input Design, 12-48VDC
- Built-in Relay Output Warning for Power Failure
- IP30 Rugged Metal Case Design
- DIN-Rail Mounting, Wall Mounting
- Operating Temperature Range - STD: -10°C ~ 65°C,



Dimensions (unit = mm)

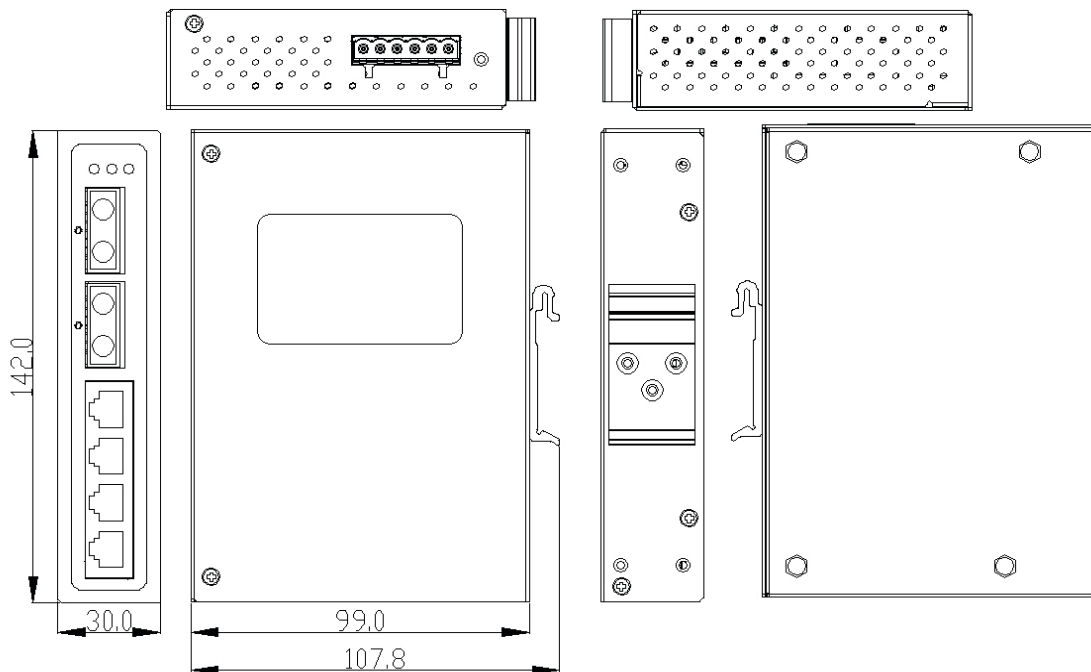

Specifications

Technology

Standards	IEEE 802.3 10BaseT Ethernet IEEE 802.3u 100BaseTX Fast Ethernet
Processing Type	Store and Forward
Protocol	CSMA/CD
Flow Control	IEEE 802.3x flow control, back pressure flow control

Switch Properties

Switch Architecture	Back-Plane: Non-Blocking Switching Fabric
Transfer Rate	14,880pps for Ethernet Port 148,800pps for Fast Ethernet Port
Memory Buffer	448Kbits
MAC Table size	2K

Interface

RJ45 Ports	4x10/100BaseT(X), auto negotiation speed, Full/Half duplex mode, and auto MDI/MDI-X connection
Fiber Port	2x100Fx SC type connector Multi-mode (2Km) - 50/125um or 62.5/125um
LED Indicators	Power 1, Power 2, Fault Ethernet Ports: On-Link/Flash-data transmitting Fiber Ports: On-Link/Flash-data transmitting
Wavelength	1310nm
Network Cable	10BaseT: 2-pair UTP/STP Cat. 3, 4, 5 cable EIA/TIA-568 100-ohm (100m) 100BaseTX: 2-pair UTP/STP Cat. 5 cable EIA/TIA-568 100-ohm (100m)

Power Requirements

Input Voltage	12-48VDC, Redundant Input
Overload Current Protection	Present(Slow-Blow Fuse)
Power Connection	1 removable 6-contact terminal block
Reverse Polarity Protection	Present
Power Consumption	6Watts
Relay Contact	24VDC, 1A resistive

Mechanical Characteristics

Housing	Metal, IP30 protection
Dimensions	30 x 142 x 99 mm
Weight	Unit Weight: 0.5kg, Shipping Weight: 0.7kg
Mounting	DIN-Rail Mounting, Wall Mounting

Environmental Limits

Operating Temperature	STD: -10°C ~ 65°C (14°F ~ 149°F)
Storage Temperature	-40°C ~ 85°C (-40°F ~ 185°F)
Ambient Relative Humidity	5 to 95%, (non-condensing)

Regulatory Approvals

EMI	FCC Part 15 Subpart B Class A, CE EN 55022 Class A
EMS	IEC61000-4-2 (ESD), IEC61000-4-3 (RS), IEC61000-4-4 (EFT), IEC61000-4-5 (Surge), IEC61000-4-6 (CS), IEC61000-4-8 (Magnetic Field)
Free Fall	IEC60068-2-32
Shock	IEC60068-2-27
Vibration	IEC60068-2-6
Green	RoHS Compliant
Warranty	5 Years

Ordering Information

ENP1U01060 6-Port Industrial Unmanaged Ethernet Switch

Due to continuous improvement, all product specifications are subject to change without further notice.



Axis Solutions Pvt. Ltd.

Plot No. 324, Road No.5, G.I.D.C., Kathwada,
Ahmedabad-382 430, Gujarat, India.
info@axisindia.in | www.axisindia.in
Tel. : +91792290 0860/61